


**Gerade Verschraubungen**

**Straight fittings**

**Racores rectos**

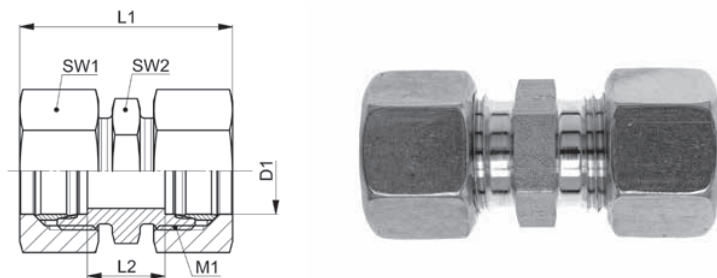

10

**GV-..L/S**

Type -D1	Mat.-Nr.	PN	M1	L1	L2	SW1	SW2	g/Stk
GV-04LL	708.1020.040.10	100	8x1.0	32.0	12.0	10	9	15
GV-06LL	708.1020.060.10	100	10x1.0	32.0	9.0	12	11	20
GV-08LL	708.1020.080.10	100	12x1.0	36.0	12.0	14	12	26
GV-10LL	708.1020.100.10	100	14x1.0	36.0	12.0	17	14	43
GV-06L	708.1020.060.20	500	12x1.5	40.0	10.0	14	12	35
GV-08L	708.1020.080.20	500	14x1.5	41.0	11.0	17	14	50
GV-10L	708.1020.100.20	500	16x1.5	44.0	13.0	19	17	65
GV-12L	708.1020.120.20	400	18x1.5	45.0	14.0	22	19	85
GV-15L	708.1020.150.20	400	22x1.5	48.0	16.0	27	24	140
GV-18L	708.1020.180.20	400	26x1.5	50.0	16.0	32	27	201
GV-22L	708.1020.220.20	250	30x2.0	54.0	20.0	36	32	274
GV-28L	708.1020.280.20	250	36x2.0	55.0	21.0	41	41	347
GV-35L	708.1020.350.20	250	45x2.0	65.5	20.0	50	46	543
GV-42L	708.1020.420.20	250	52x2.0	68.0	21.0	60	55	790
GV-06S	708.1020.060.30	800	14x1.5	46.0	16.0	17	14	65
GV-08S	708.1020.080.30	800	16x1.5	48.0	18.0	19	17	83
GV-10S	708.1020.100.30	800	18x1.5	51.0	17.0	22	19	110
GV-12S	708.1020.120.30	630	20x1.5	53.0	19.0	24	22	135
GV-14S	708.1020.140.30	630	22x1.5	59.0	22.0	27	24	187
GV-16S	708.1020.160.30	630	24x1.5	60.0	21.0	30	27	229
GV-20S	708.1020.200.30	420	30x2.0	69.0	23.0	36	32	371
GV-25S	708.1020.250.30	420	36x2.0	77.0	26.0	46	41	672
GV-30S	708.1020.300.30	420	42x2.0	83.0	27.0	50	46	821
GV-38S	708.1020.380.30	420	52x2.0	95.0	29.0	60	55	1215

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.

**ISO 8434-1-SC**

D1=Rohr außen-Ø  
M1=metrisches Anschlußgewinde

D1=tube outside diameter  
M1=metric connecting thread

D1=Ø exterior del tubo  
M1=rosca métrica conexión