


Gerade Schottverschraubungen

Bulkhead fittings

Racores pasatabiques rectos

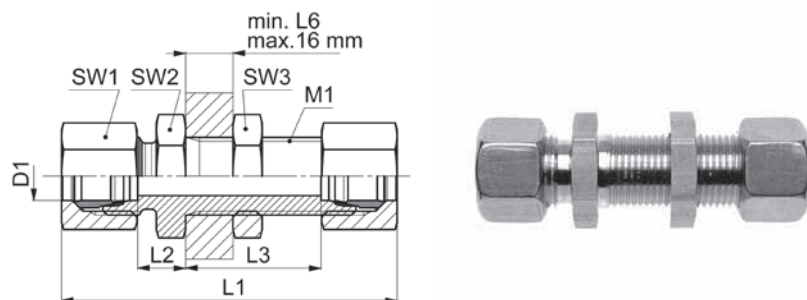

GSV-..L/S

Type -D1	Mat.-Nr.	PN	M1	L1	L2	L3	SW1	SW2	SW3	g/Stk
GSV-06L	708.1500.060.20	500	12x1.5	64.0	7.0	27.0	14	17	17	72
GSV-08L	708.1500.080.20	500	14x1.5	65.0	8.0	27.0	17	19	19	83
GSV-10L	708.1500.100.20	500	16x1.5	68.0	10.0	28.0	19	22	22	125
GSV-12L	708.1500.120.20	400	18x1.5	69.0	10.0	29.0	22	24	24	135
GSV-15L	708.1500.150.20	400	22x1.5	73.0	12.0	31.0	27	27	30	230
GSV-18L	708.1500.180.20	400	26x1.5	79.0	13.5	32.5	32	32	36	345
GSV-22L	708.1500.220.20	250	30x2.0	84.0	16.5	34.5	36	36	41	435
GSV-28L	708.1500.280.20	250	36x2.0	90.0	18.5	35.5	41	41	46	545
GSV-35L	708.1500.350.20	250	45x2.0	100.0	18.5	36.5	50	50	55	874
GSV-42L	708.1500.420.20	250	52x2.0	101.0	19.0	36.0	60	60	65	1365
GSV-06S	708.1500.060.30	800	14x1.5	71.0	12.0	29.0	17	19	19	112
GSV-08S	708.1500.080.30	800	16x1.5	72.0	13.0	29.0	19	22	22	132
GSV-10S	708.1500.100.30	800	18x1.5	77.0	14.5	29.5	22	24	24	170
GSV-12S	708.1500.120.30	630	20x1.5	78.0	14.5	30.5	24	27	27	215
GSV-14S	708.1500.140.30	630	22x1.5	85.0	17.0	32.0	27	30	30	322
GSV-16S	708.1500.160.30	630	24x1.5	85.0	16.5	31.5	30	32	32	345
GSV-20S	708.1500.200.30	420	30x2.0	97.0	17.5	33.5	36	41	41	575
GSV-25S	708.1500.250.30	420	36x2.0	106.0	20.0	35.0	46	46	46	949
GSV-30S	708.1500.300.30	420	42x2.0	115.0	21.5	37.5	50	50	50	1120
GSV-38S	708.1500.380.30	420	52x2.0	123.0	22.0	37.0	60	65	65	1445

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

für D1 ≤ 18 mm L6 = 3 mm
für D1 > 18 mm L6 = 4 mm

Sizes are approximate dimensions at tightened nut.

for D1 ≤ 18 mm L6 = 3 mm
for D1 > 18 mm L6 = 4 mm

Las medidas son aproximadas con la tuerca de unión apretada.

para D1 ≤ 18 mm L6 = 3 mm
para D1 > 18 mm L6 = 4 mm

ISO 8434-1-BHSC+LN