


Winkel-Einschraubverschraubungen NPT

Male adaptor elbow fittings NPT

Racores para roscar en codo NPT

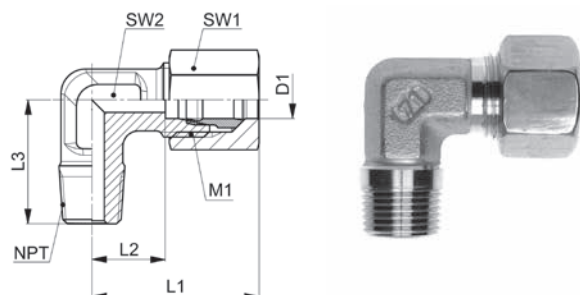

WEV-..LNPT

Type -D1 NPT	Mat.-Nr.	PN	NPT	M1	L1	L2	L3	SW1	SW2	g/Stk
NPT=Einschraubgewinde NPT		NPT=tapered male adaptor thread NPT				NPT=rosca de conexión cónica NPT				
WEV-04LLNPT 1.8	708.2402.060.10	100	1/8	8x1.0	21.0	11.0	17.0	10	9	17
WEV-06LLNPT 1.8	708.2402.100.10	100	1/8	10x1.0	21.0	9.5	17.0	12	9	18
WEV-08LLNPT 1.8	708.2402.160.10	100	1/8	12x1.0	23.0	11.5	20.0	14	12	24
WEV-06LNPT 1.8	708.2402.100.20	500	1/8	12x1.5	27.0	12.0	20.0	14	12	32
WEV-06LNPT 1.4	708.2402.110.20	500	1/4	12x1.5	25.0	10.0	25.5	14	12	36
WEV-06LNPT 3.8	708.2402.120.20	500	3/8	12x1.5	29.0	14.0	28.0	14	14	52
WEV-08LNPT 1.8	708.2402.160.20	500	1/8	14x1.5	29.0	14.0	24.0	17	12	42
WEV-08LNPT 1.4	708.2402.170.20	500	1/4	14x1.5	29.0	14.0	26.0	17	12	44
WEV-08LNPT 3.8	708.2402.180.20	500	3/8	14x1.5	30.0	15.0	28.0	17	14	71
WEV-08LNPT 1.2	708.2402.185.20	500	1/2	14x1.5	34.0	19.0	34.0	17	17	104
WEV-10LNPT 1.4	708.2402.270.20	500	1/4	16x1.5	30.0	15.0	26.0	19	14	56
WEV-10LNPT 3.8	708.2402.280.20	500	3/8	16x1.5	30.0	15.0	28.0	19	14	60
WEV-10LNPT 1.2	708.2402.285.20	500	1/2	16x1.5	36.5	21.0	30.0	19	17	100
WEV-12LNPT 1.4	708.2402.380.20	400	1/4	18x1.5	32.0	17.0	26.0	22	17	76
WEV-12LNPT 3.8	708.2402.390.20	400	3/8	18x1.5	32.0	17.0	28.0	22	17	76
WEV-12LNPT 1.2	708.2402.400.20	400	1/2	18x1.5	36.5	21.0	34.0	22	17	118
WEV-15LNPT 1.2	708.2402.534.20	400	1/2	22x1.5	36.0	21.0	34.0	27	19	138
WEV-18LNPT 1.2	708.2402.646.20	400	1/2	26x1.5	40.0	23.5	36.0	32	24	184
WEV-18LNPT 3.4	708.2402.648.20	400	3/4	26x1.5	40.0	23.5	36.0	32	24	200
WEV-22LNPT 3.4	708.2402.768.20	250	3/4	30x2.0	44.5	27.5	42.0	36	27	252
WEV-28LNPT 1.1	708.2402.850.20	250	1	36x2.0	47.0	30.5	48.0	41	36	420
WEV-35LNPT 5.4	708.2402.944.20	250	1 1/4	45x2.0	56.0	34.5	54.0	50	41	587
WEV-42LNPT 3.2	708.2402.992.20	250	1 1/2	52x2.0	63.0	40.0	61.0	60	50	845

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.