


Winkel-Einschraubverschraubungen NPT

Male adaptor elbow fittings NPT

Racores para roscar en codo NPT

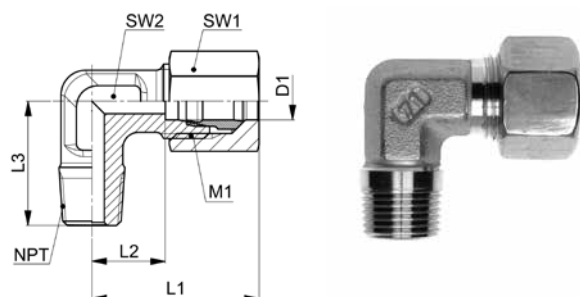

10

WEV-..SNPT

Type -D1 NPT	Mat.-Nr.	PN	NPT	M1	L1	L2	L3	SW1	SW2	g/Stk
NPT=Einschraubgewinde NPT		NPT=tapered male adaptor thread NPT				NPT=rosca de conexión cónica NPT				
WEV-06SNPT 1.4	708.2402.110.30	800	1/4	14x1.5	31.0	16.3	26.0	17	12	54
WEV-06SNPT 3.8	708.2402.120.30	800	3/8	14x1.5	31.0	16.0	28.0	17	14	70
WEV-06SNPT 1.2	708.2402.125.30	800	1/2	14x1.5	31.0	16.0	33.0	17	17	99
WEV-08SNPT 1.4	708.2402.170.30	800	1/4	16x1.5	32.5	17.0	26.0	19	14	68
WEV-08SNPT 3.8	708.2402.180.30	800	3/8	16x1.5	33.0	18.0	28.0	19	17	76
WEV-08SNPT 1.2	708.2402.185.30	800	1/2	16x1.5	36.0	21.0	34.0	19	17	133
WEV-10SNPT 1.4	708.2402.270.30	800	1/4	18x1.5	34.5	17.5	26.0	22	17	88
WEV-10SNPT 3.8	708.2402.280.30	800	3/8	18x1.5	34.5	17.5	28.0	22	17	98
WEV-12SNPT 1.4	708.2402.380.30	630	1/4	20x1.5	38.0	21.5	27.0	24	17	104
WEV-12SNPT 3.8	708.2402.390.30	630	3/8	20x1.5	38.0	21.5	28.0	24	17	112
WEV-12SNPT 1.2	708.2402.400.30	630	1/2	20x1.5	39.0	21.5	33.0	24	17	132
WEV-14SNPT 3.8	708.2402.502.30	630	3/8	22x1.5	40.5	22.0	28.0	27	19	148
WEV-14SNPT 1.2	708.2402.504.30	630	1/2	22x1.5	40.0	22.0	34.0	27	19	158
WEV-16SNPT 1.2	708.2402.655.30	420	1/2	24x1.5	43.0	24.5	36.0	30	24	206
WEV-20SNPT 3.4	708.2402.708.30	420	3/4	30x2.0	49.5	26.5	42.0	36	27	318
WEV-25SNPT 1.1	708.2402.810.30	420	1	36x2.0	55.5	30.0	48.0	46	36	616
WEV-30SNPT 5.4	708.2402.902.30	320	1 1/4	42x2.0	63.5	35.5	54.0	50	41	829
WEV-38SNPT 3.2	708.2402.953.30	320	1 1/2	52x2.0	74.0	41.0	61.0	60	50	1175

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.