

Schweißkegel


mit O-Ring

Weldable cones

with O-ring

Conos para soldar

con junta tórica

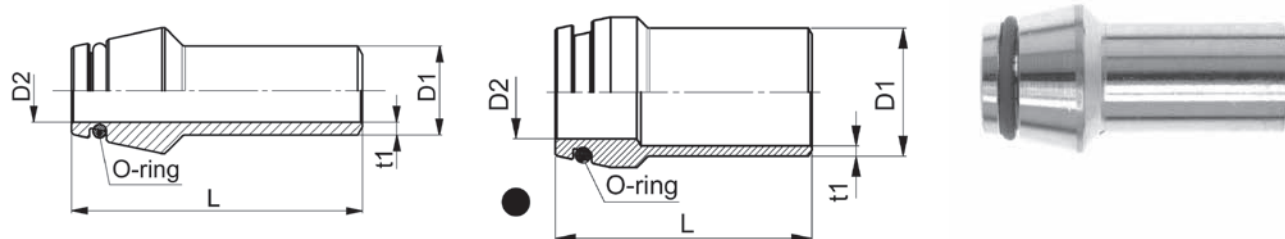
SKO

Type-D1 x t1	Mat.-Nr.	D2	L	O-Ring	g/Stk
◇ SKO-06x1,5	708.1453.061.30	3.0	31.0	4.0x1.5	6
◇ SKO-08x1,5	708.1453.081.30	5.0	31.0	6.0x1.5	6
◇ SKO-08x2,0	708.1453.082.30	4.0	31.0	6.0x1.5	10
◇ SKO-10x1,5	708.1453.105.30	7.0	32.5	7.5x1.5	12
◇ SKO-10x2,0	708.1453.108.30	6.0	32.5	7.5x1.5	14
SKO-12x1,5	708.1453.122.30	9.0	32.5	9.0x1.5	16
◇ SKO-12x2,0	708.1453.125.30	8.0	32.5	9.0x1.5	18
SKO-12x2,5	708.1453.123.30	7.0	32.5	9.0x1.5	22
SKO-12x3,0	708.1453.124.30	6.0	32.5	9.0x1.5	24
SKO-14x2,0	708.1453.141.30	10.0	40.0	10.0x2.0	24
SKO-14x3,0	708.1453.142.30	8.0	40.0	10.0x2.0	34
SKO-15x2,0	708.1453.151.30	11.0	36.0	12.0x2.0	24
◇ SKO-15x2,5	708.1453.152.30	10.0	36.0	12.0x2.0	30
SKO-16x2,0	708.1453.161.30	12.0	39.0	12.0x2.0	30
◇ SKO-16x2,5	708.1453.162.30	11.0	39.0	12.0x2.0	36
SKO-16x3,0	708.1453.163.30	10.0	39.0	12.0x2.0	40
• SKO-18x1,5	708.1453.181.30	15.0	36.0	15.0x2.0	24
SKO-18x2,0	708.1453.182.30	14.0	36.0	15.0x2.0	31
◇ SKO-18x2,5	708.1453.183.30	13.0	36.0	15.0x2.0	38
SKO-20x2,0	708.1453.204.30	16.0	44.5	16.3x2.4	44
SKO-20x2,5	708.1453.201.30	15.0	44.5	16.3x2.4	54
◇ SKO-20x3,0	708.1453.202.30	14.0	44.5	16.3x2.4	62
SKO-20x3,5	708.1453.205.30	13.0	44.5	16.3x2.4	70
SKO-20x4,0	708.1453.203.30	12.0	44.5	16.3x2.4	76
SKO-22x2,0	708.1453.221.30	18.0	38.5	20.0x2.0	40
◇ SKO-22x2,5	708.1453.223.30	17.0	38.5	20.0x2.0	62
◇ SKO-25x3,0	708.1453.253.30	19.0	49.5	20.3x2.4	88
SKO-25x3,5	708.1453.258.30	18.0	49.5	20.3x2.4	99
SKO-25x4,0	708.1453.255.30	18.0	49.5	20.3x2.4	110
SKO-25x5,0	708.1453.256.30	15.0	49.5	20.3x2.4	130
◇ SKO-28x2,5	708.1453.281.30	23.0	41.5	26.0x2.0	70
SKO-28x3,0	708.1453.282.30	22.0	41.5	26.0x2.0	80

Fortsetzung nächste Seite

Continued on next page

Continuación página próxima

Schweißkegel




mit O-Ring

Weldable cones

with O-ring

Conos para soldar

con junta tórica

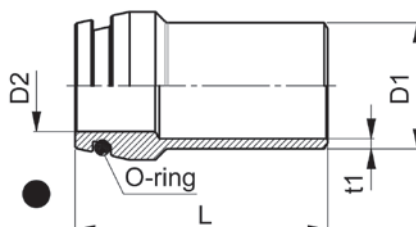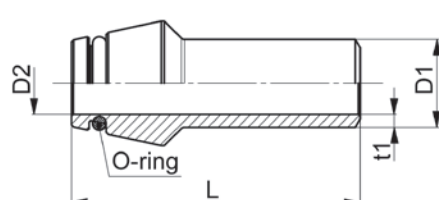

10

SKO

Type-D1 x t1	Mat.-Nr.	D2	L	O-Ring	g/Stk
◇ SKO-30x3,0	708.1453.301.30	24.0	52.0	25.3x2.4	114
SKO-30x4,0	708.1453.302.30	22.0	52.0	25.3x2.4	142
SKO-30x5,0	708.1453.304.30	20.0	52.0	25.3x2.4	168
SKO-30x6,0	708.1453.306.30	18.0	52.0	25.3x2.4	192
◇ SKO-35x3,0	708.1453.351.30	29.0	47.0	32.0x2.5	123
SKO-35x3,5	708.1453.352.30	28.0	47.0	32.0x2.5	138
SKO-35x4,0	708.1453.353.30	27.0	47.0	32.0x2.5	152
◇ SKO-38x3,0	708.1453.384.30	32.0	56.5	33.3x2.4	160
SKO-38x4,0	708.1453.381.30	30.0	56.5	33.3x2.4	200
SKO-38x5,0	708.1453.385.30	28.0	56.5	33.3x2.4	242
SKO-38x6,0	708.1453.382.30	26.0	56.5	33.3x2.4	276
◇ SKO-42x3,0	708.1453.993.30	36.0	47.0	38.0x2.5	150
SKO-42x4,0	708.1453.994.30	34.0	47.0	38.0x2.5	188

O-Ringe aus FKM werden separat mitgeliefert, erst nach dem Schweißvorgang aufziehen.

FKM O-rings supplied separately, to be fitted after welding.

Las juntas tóricas de FKM se suministran por separado; montarlas después de soldar.

 passend in 24°-Innenkonus
(Bohrungsform W DIN 3861)

 fitting type 24° inside tapers
(bore type W DIN 3861)

 encaja en cono interior de 24°
(forma de taladro W DIN 3861)

ISO 8434-1-WDNP