

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Winkel-Einschraubverschraubungen


Einschraubgewinde: Whitworth-Rohrgewinde - kegelig

Elbows, male

Stud thread: BSP thread - taper

Racores para roscar en codo

Rosca de conexión: Rosca Whitworth para tubos - cónica

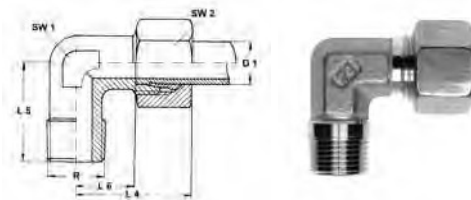

WEV-..SRK

Type	Mat.-Nr.	Serie	PN	D1	R	L4	L5	L6	SW1	SW2	g/Stk
WEV-06SRK 1.8	708.2401.100.30	S	400	6	1/8	29.5	25.0	15.0	12	17	
● WEV-06SRK 1.4	708.2401.110.30	S	400	6	1/4	31.0	26.0	16.0	12	17	49
WEV-06SRK 3.8	708.2401.120.30	S	400	6	3/8	31.0	28.0	16.0	14	17	
WEV-06SRK 1.2	708.2401.125.30	S	400	6	1/2	31.0	30.0	16.0	17	17	
● WEV-08SRK 1.4	708.2401.170.30	S	400	8	1/4	32.0	27.0	17.0	14	19	69
WEV-08SRK 3.8	708.2401.180.30	S	400	8	3/8	32.0	27.0	17.0	14	19	79
WEV-08SRK 1.2	708.2401.185.30	S	400	8	1/2	32.0	30.0	17.0	17	19	102
WEV-10SRK 1.4	708.2401.270.30	S	400	10	1/4	34.0	27.0	17.5	17	22	92
● WEV-10SRK 3.8	708.2401.280.30	S	400	10	3/8	34.0	28.0	17.5	17	22	95
WEV-10SRK 1.2	708.2401.285.30	S	400	10	1/2	34.0	31.0	17.5	17	22	131
● WEV-12SRK 3.8	708.2401.390.30	S	400	12	3/8	38.0	28.0	21.5	17	24	115
WEV-12SRK 1.2	708.2401.400.30	S	400	12	1/2	38.0	32.0	21.5	17	24	130
WEV-14SRK 3.8	708.2401.502.30	S	400	14	3/8	40.0	31.0	22.0	19	27	147
● WEV-14SRK 1.2	708.2401.504.30	S	400	14	1/2	40.0	32.0	22.0	19	27	158
● WEV-16SRK 1.2	708.2401.566.30	S	400	16	1/2	43.0	32.0	24.5	24	30	200

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.