


Winkelverschraubungen

Equal elbows

Racores codo

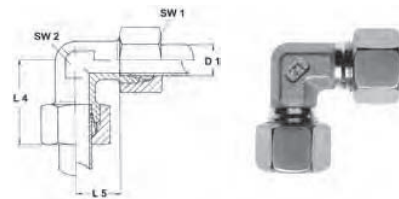

WV-..L/S

Type	Mat.-Nr.	Serie	PN	D1	L4	L5	SW1	SW2	g/Stk
WV-04LL	708.2000.040.10	LL	100	4	21.0	11.0	10	9	19
WV-06LL	708.2000.060.10	LL	100	6	21.0	9.5	12	9	24
WV-08LL	708.2000.080.10	LL	100	8	23.0	11.5	14	12	32
WV-10LL	708.2000.100.10	LL	100	10	24.0	12.5	17	12	32
WV-12LL	708.2000.120.10	LL	100	12	25.0	13.0	19	14	41
WV-06L	708.2000.060.20	L	315	6	27.0	12.0	14	12	42
WV-08L	708.2000.080.20	L	315	8	29.0	14.0	17	12	59
WV-10L	708.2000.100.20	L	315	10	30.0	15.0	19	14	74
WV-12L	708.2000.120.20	L	315	12	32.0	17.0	22	17	103
WV-15L	708.2000.150.20	L	315	15	36.0	21.0	27	19	169
WV-18L	708.2000.180.20	L	315	18	40.0	23.5	32	24	248
WV-22L	708.2000.220.20	L	160	22	44.0	27.5	36	27	320
WV-28L	708.2000.280.20	L	160	28	47.0	30.5	41	36	454
WV-35L	708.2000.350.20	L	160	35	56.0	34.5	50	41	675
WV-42L	708.2000.420.20	L	160	42	63.0	40.0	60	50	1070
WV-06S	708.2000.060.30	S	630	6	31.0	16.0	17	12	74
WV-08S	708.2000.080.30	S	630	8	31.0	17.0	19	14	95
WV-10S	708.2000.100.30	S	630	10	34.0	17.5	22	17	128
WV-12S	708.2000.120.30	S	630	12	38.0	21.5	24	17	159
WV-14S	708.2000.140.30	S	630	14	40.0	22.0	27	19	210
WV-16S	708.2000.160.30	S	400	16	43.0	24.5	30	24	260
WV-20S	708.2000.200.30	S	400	20	48.0	26.5	36	27	410
WV-25S	708.2000.250.30	S	400	25	54.0	30.0	46	36	776
WV-30S	708.2000.300.30	S	400	30	62.0	35.5	50	41	1003
WV-38S	708.2000.380.30	S	315	38	72.0	41.0	60	50	1535

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.